


DECK SPECIFICATIONS & DETAILS

PLEASE COMPLETE ITEMS ONE THROUGH EIGHT

1. DECK SIZE _____ X _____
2. FOOTING SIZE DIA. _____ THICKNESS _____
3. FOOTING DEPTH _____
4. POST _____ X _____ @ _____ O.C.
5. CARRIER BEAM (_____) EA. _____ X _____
6. DECK JOIST _____ X _____ @ _____ O.C.
7. DECKING _____ X _____
8. GUARD RAIL HEIGHT _____

BEAM SIZE	MAX BEAM SPANS	
	JOIST SPAN	BEAM SPAN
(2)2X6	6'	7'
(2)2X8	8'	8'
(2)2X8	12'	6'
(2)2X10	12'	7'
(2)2X10	16'	6'
(2)2X12	12'	8'

MAX JOIST SPAN		
2X6	16" O.C.	9'
2X6	24" O.C.	7'
2X8	16" O.C.	11'0"
2X8	24" O.C.	9'8"
2X10	16" O.C.	14'
2X10	24" O.C.	11'5"
2X12	16" O.C.	16'6"
2X12	24" O.C.	13'6"

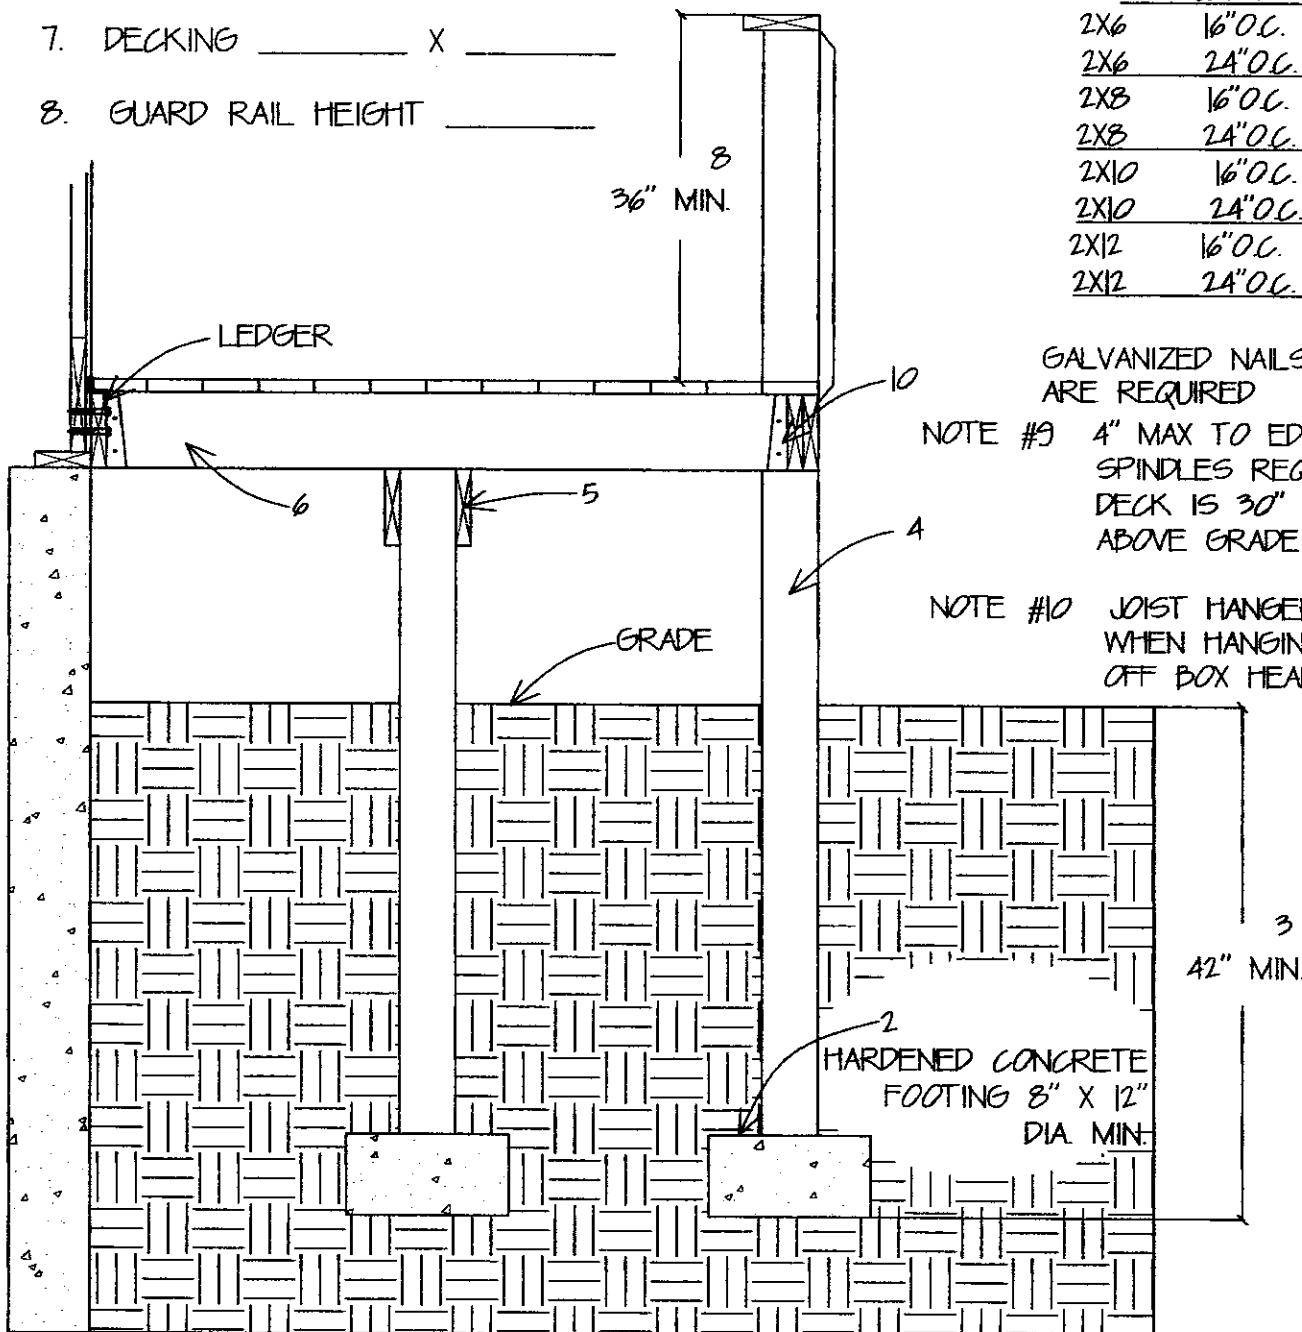

GALVANIZED NAILS & SCREWS ARE REQUIRED

NOTE #9 4" MAX TO EDGES OF SPINDLES REQUIRED WHEN DECK IS 30" OR MORE ABOVE GRADE

NOTE #10 JOIST HANGERS REQUIRED WHEN HANGING JOIST OFF BOX HEADER